

FURCIFER

FOAM CONCENTRATE PROPORTIONING DEVICE



FEATURES

Van Truck


Water Pump < 20,000 lpm

Class B

* by default

	120	180	240	360	600
Foam concentrate flow range	12 to 120 lpm	18 to 180 lpm	24 to 240 lpm	36 to 360 lpm	60 to 600 lpm
Suction	-0.2 bar				
Pressure	15 bar				
Dosing range*	1 to 6%				
Water flow range*	3": 80 to 3,000 lpm	4": 150 to 5,000 lpm	4": 150 to 5,000 lpm	5": 250 to 8,000 lpm	6": 350 to 10,000 lpm
Product viscosity compatibility	< 120 Mpa.s ⁽²⁾ at 20°C				

⁽¹⁾ Other pump flow rate ranges available on request - ⁽²⁾ At 375 s⁻¹ shear rate following the norm EN 1568-3:2018

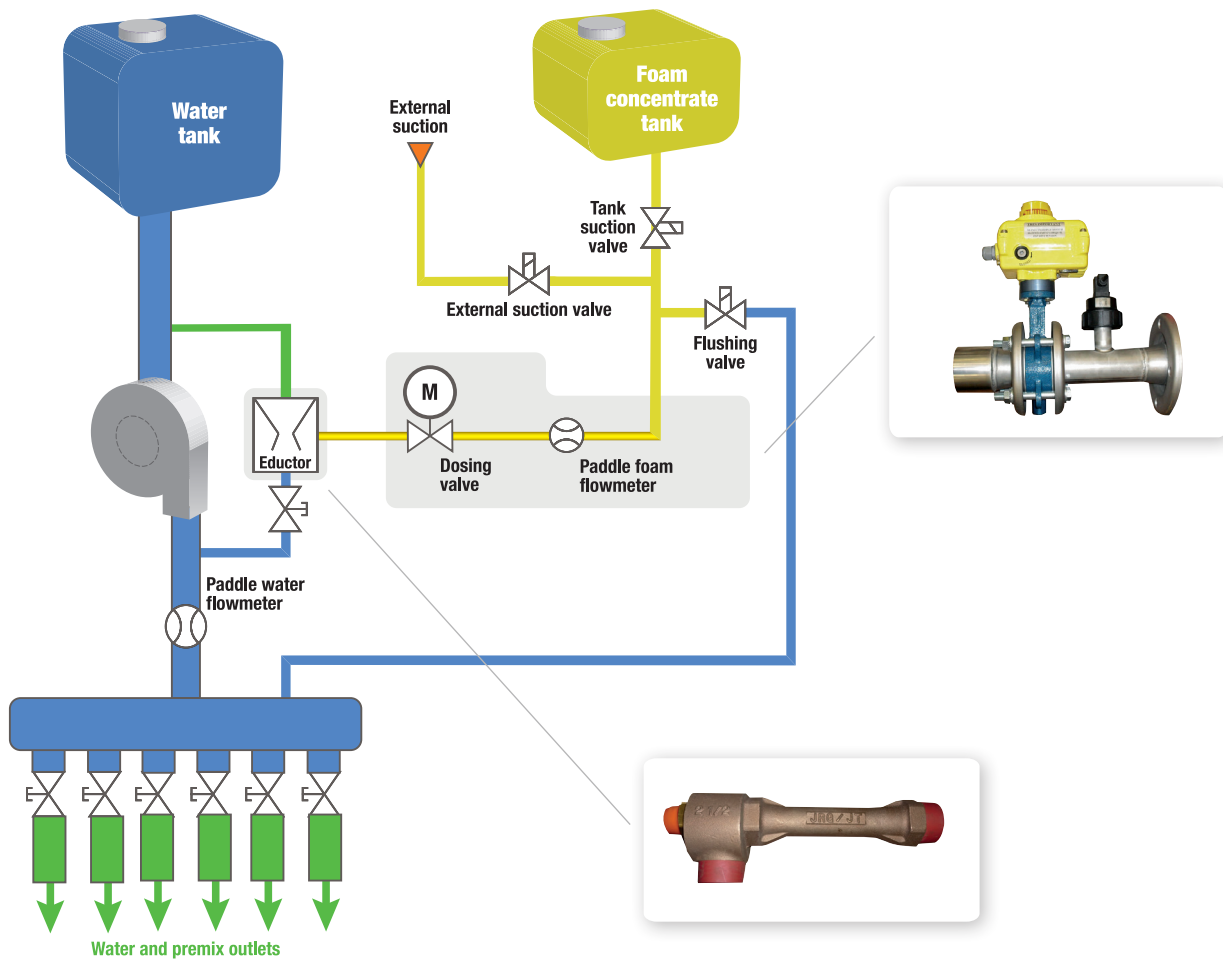

POSSIBLE OPTIONS



Additional screen



External suction hose



Pneumatic suction valve

